
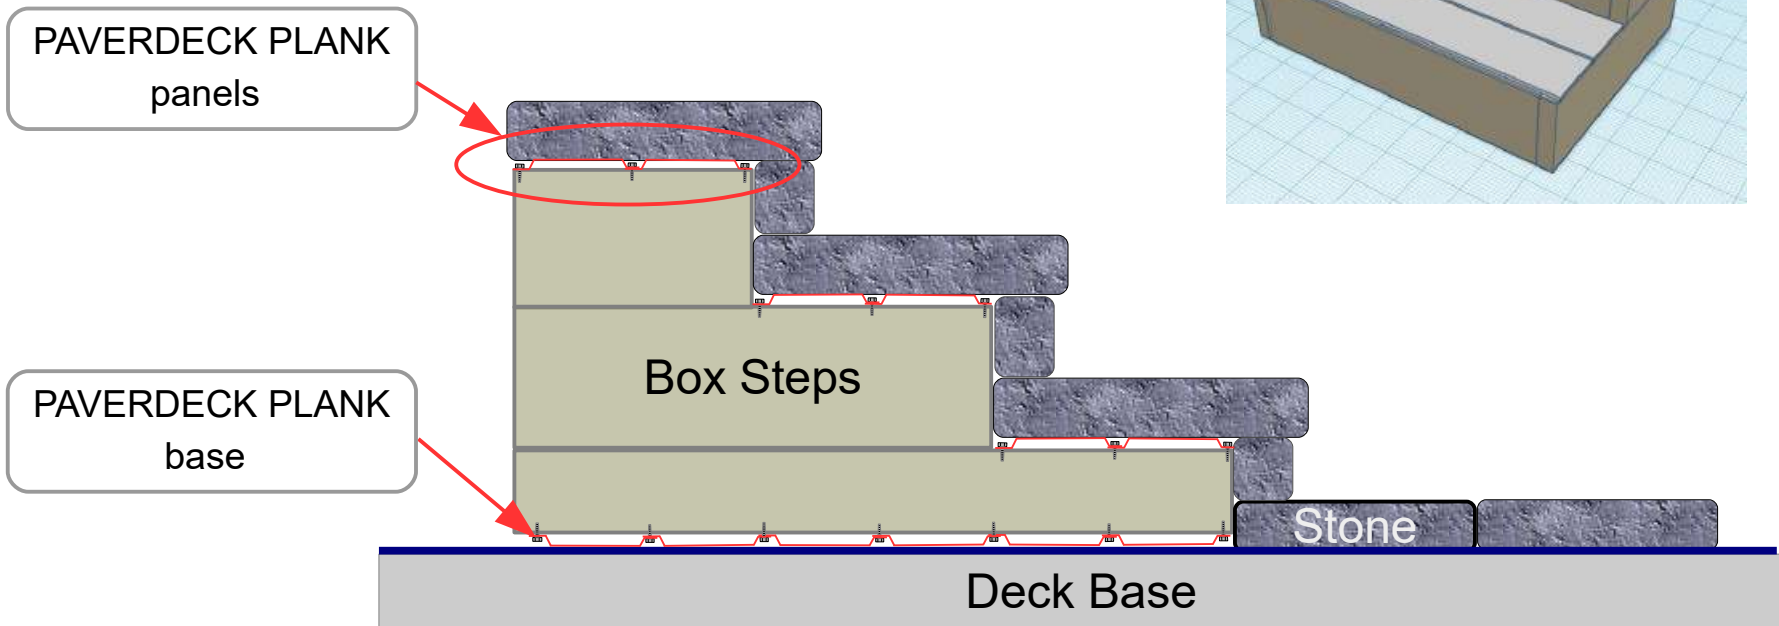


### Sample construction of PAVERDECK PLANK box stairs

on any deck platform. Wood boxes are constructed as required to achieve the appropriated riser height and tread width taking into account the height of the PAVERDECK PLANK panel (0.5") and the height of the stone used. PAVERDECK PLANK panels must be supported every 16 inches. The boxes are placed on a PAVERDECK PLANK base to protect against moisture damage. Joist Tape can be used between the wood and the panels.

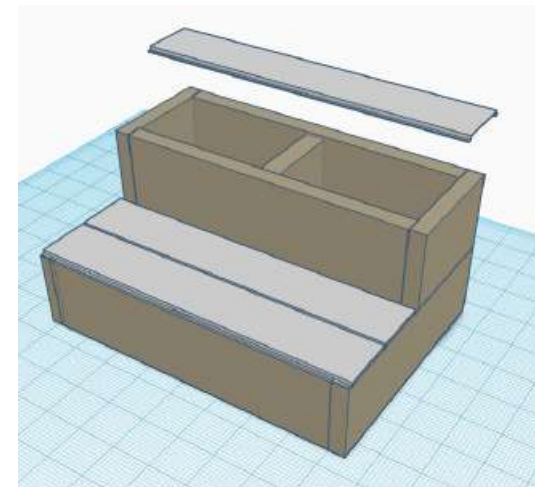

For discussion purposes only

## Sample construction of PAVERDECK PLANK stairs Using wood stair stringers

