



WOOD TILES

BEAUTY, LONGEVITY AND EXCEPTIONAL VALUE

BISON WOOD TILES

November 2016

Constructed from responsibly harvested hardwoods, Bison Wood Tiles are crafted from premium grade remnants.

- Commercial Grade
- Species Include: Cumaru, Garapa, Ipê, Mahogany and Massaranduba
- Exclusive Bison FS1 Fastening Kit & Continuous Kerf Cut Design* allows easy tile attachment, removal and replacement
- Modular sizes 2' x 2' and 2' x 4'
- Custom sizes available
- FSC Certified (FSC-CO13454) species available
- Full System Warranty with Bison Pedestals
- Bison Ipê Wood Tile Systems Meet:
 - ASTM E108-07a Class A Fire Rating
 - ASTM C1028-07 Slip Resistance
 - ASTM TAS108-95 Wind Uplift
 - Seismic Design Categories (SDC) A-F



*US #8,302,356 Patents and Patents Pending

Copyright 2016 United Construction Products, Inc. All Rights Reserved.



Bison Wood Tile
Fastening Kit†
Model: FS1

Installation

Bison recommends the use of Bison Pedestals and the FS1 Fastening Kit† when installing Bison Wood Tiles. The Bison Pedestal/Wood Tile system installs quickly, securely and allows single tile removal after installation, if needed. The FS1 Fastening Kit†, available exclusively from Bison, fastens wood tiles to the pedestals without penetrating or damaging the wood. Place FS1 washer between the bottom rail of the tile and the upper slat. Screw FS1 screw through the FS1 washer, into center hole of spacer tabs and into pedestal. Make sure that the washer secures all corners of the wood tiles and then tighten. To remove a wood tile: loosen screw and using a screwdriver, rotate washer to release wood tile.

Testing

Bison Ipê Wood Tiles meet or exceed these standards.

Note: Customer to verify acceptable uses for each project according to the presiding building code authority. All products to be installed per the most recent Bison Innovative Products specifications at the time of installation.

Environmental	FSC Certification	Call for Available Species
Slip Resistance	ASTM C1028	SCOF Dry .90 and Wet .72
Solar Reflective Indices	ASTM E 1980-11	45 (Average) New 36 (Average) Weathered One Year
Solar Reflectance	ASTM C1549-09	0.321 New 0.403 Weathered One Year
Hemispherical Emittance	ASTM C1371-04a	0.894 New 0.925 Weathered One Year
Wind Uplift on Pedestals	FBC TAS-108	Aerodynamic Multiplier
Seismic	ICC ES AC-156	For use in Seismic Zones A-F with Bison Seismic System & Installation Guidelines
Fire – Flame Spread	ASTM E108-07a	Class A
Fire – Smoke Spread	ASTM E-84-08A	Class B
Fire – SF WUI Under-Flame Test	SFA 12-7-A-4 Part A	Pass
Concentrated Load on Pedestals	ICC ES AC300-2010	1250 lbs/psf FoS:3
Uniform Load on Pedestals	ICC ES AC300-2010	1250 lbs/psf FoS:3
Installation Temperature	NRCA Standard	40° F and above
Max. Bison Pedestal Height	Bison	36" with Bison Bracing System

†US #8,302,356 Patent and Patents Pending

Copyright 2016 United Construction Products, Inc. All Rights Reserved.



Sourcing

Bison ensures that the tropical hardwoods used in all their wood tile products are harvested from sustainable sources. Bison Wood Tiles are constructed from premium grade remnants from the flooring and furniture industries that comply with strict regulations regarding extraction, milling and transport. All Bison Wood Tiles meet the IBAMA (Brazilian Institute of Environment and Renewable Resources) requirements that show Proof of Origin and Legal Harvesting. Bison Wood Tiles also comply with US Lacey Act requirements.



Copyright 2016 United Construction Products, Inc. All Rights Reserved.





Ipê Wood Tiles



Model: WT-IPE-24
Fire Rating: Class A*
Species: Ipê
Surface: Smooth or Ribbed
Color: Brown**
Janka Hardness Rating: 3,680 lbs.
Dimensions: 23.875" x 23.875" x 1.69"
Weight: 24 lbs.
Weight psf: 6 lbs.
New Bison Continuous Kerf[©] cut design***



Model: WT-IPE-48
Fire Rating: Class A*
Species: Ipê
Surface: Smooth or Ribbed
Color: Brown**
Janka Hardness Rating: 3,680 lbs.
Dimensions: 47.9375" x 23.875" x 1.69"
Weight: 48 lbs.
Weight psf: 6 lbs.
New Bison Continuous Kerf[©] cut design***

Copyright 2016 United Construction Products, Inc. All Rights Reserved.



Cumaru Wood Tiles



Model: WT-CUMARU-24
Fire Rating: Class A*
Species: Cumaru
Surface: Smooth
Color: Golden brown**
Janka Hardness Rating: 3,540 lbs.
Dimensions: 23.875" x 23.875" x 1.69"
Weight: 24 lbs.
Weight psf: 6 lbs.
New Bison Continuous Kerf[©] cut design***



Model: WT-CUMARU-48
Fire Rating: Class A*
Species: Cumaru
Surface: Smooth
Color: Golden brown**
Janka Hardness Rating: 3,540 lbs.
Dimensions: 47.9375" x 23.875" x 1.69"
Weight: 48 lbs.
Weight psf: 6 lbs.
New Bison Continuous Kerf[©] cut design***

*Meets and Exceeds ASTM E108-07a Class A Spread of Flame Test.
**Wood tile colors may differ than pictured and change without notice.
***Patent Pending.

Copyright 2016 United Construction Products, Inc. All Rights Reserved.





FSC® Ipê Wood Tiles



Model: WT-FSC-100%-IPE-24
Fire Rating: Class A*
Species: Ipê
Surface: Smooth
Color: Brown**
Janka Hardness Rating: 3,680 lbs.
Dimensions: 23.875" x 23.875" x 1.69"
Weight: 24 lbs.
Weight psf: 6 lbs.
New Bison Continuous Kerf® cut design***

FSC® Garapa Wood Tiles



Model: WT-FSC-100%-GARAPA-24
Fire Rating: Class A*
Species: Garapa
Surface: Smooth
Color: Golden brown**
Janka Hardness Rating: 1,630 lbs.
Dimensions: 23.875" x 23.875" x 1.69"
Weight: 24 lbs.
Weight psf: 6 lbs.
New Bison Continuous Kerf® cut design***



The mark of
responsible forestry

Copyright 2016 United Construction Products, Inc. All Rights Reserved.



FSC® Cumaru Wood Tiles



Model: WT-FSC-100%-CUMARU-24
Fire Rating: Class A*
Species: Cumaru
Surface: Smooth
Color: Golden brown**
Janka Hardness Rating: 3,540 lbs.
Dimensions: 23.875" x 23.875" x 1.69"
Weight: 24 lbs.
Weight psf: 6 lbs.
New Bison Continuous Kerf® cut design***

FSC® Massaranduba Wood Tiles



Model: WT-FSC-100%-MASS-24
Fire Rating: Class A*
Species: Massaranduba
Surface: Ribbed
Color: Reddish brown**
Janka Hardness Rating: 3,190lbs.
Dimensions: 23.875" x 23.875" x 1.69"
Weight: 24 lbs.
Weight psf: 6 lbs.
New Bison Continuous Kerf® cut design***

*Meets and Exceeds ASTM E108-07a Class A Spread of Flame Test.
**Wood tile colors may differ than pictured and change without notice.
***Patent Pending.




The mark of responsible forestry

Copyright 2016 United Construction Products, Inc. All Rights Reserved.





Mahogany Wood Tiles

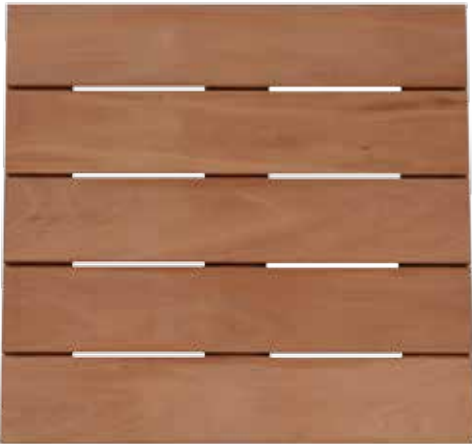

Model: WT-MAHOGANY 24-5 SMOOTH

Fire Rating: Class A*

Species: Fijian Mahogany

Surface: Smooth

Color: Golden brown**

Janka Hardness Rating: 800 lbs.

Dimensions: 24.125" x 24.125" x 1.77"

Weight: 14 lbs.

Weight psf: 3.5 lbs.

New Bison Continuous Kerf[©] cut design***

Bison Genuine Mahogany Wood Tiles are harvested from government regulated Fijian plantations. The forests are closely regulated, adhere to strict performance requirements, are Lacey Act compliant, and are CITES exempt. The same protocols are followed during manufacturing in Vietnam to ensure the mahogany only comes from Fijian plantations. Bison Genuine Mahogany Wood Tiles can be easily stained to match interior flooring or to match specific color requirements.



Ipê EcoTile

Model: WT-IPE-48-ECO

Fire Rating: Class A*

Species: Ipê

Surface: Smooth

Color: Brown**

Janka Hardness Rating: 3,680 lbs.

Dimensions: 47.9375 x 23.875 x 1.69"

Weight: 60 lbs/tile

Weight psf: 7.5 lbs/tile

New Bison Continuous Kerf[©] cut design***

Special Purchase at Bison. We are committed to utilizing ipê remnants from other industries. So, when we had the chance to manufacture 2' x 4' ipê tiles using the "short shorts" we jumped at the chance.

Bison ECOtiles:

- Beautiful custom look
- Exceptionally strong
- Climate tested and weathered beautifully under Colorado's hot summer sun
- Limited Availability

*Meets and Exceeds ASTM E108-07a Class A Spread of Flame Test.

**Wood tile colors may differ than pictured and change without notice.

***Patent Pending.





Special Order Wood Tiles

Model: WT-IPE-72-SMOOTH
WT-IPE-96-SMOOTH

Species: Ipê
Surface: Smooth
Color: Brown**
Janka Hardness Rating: 3,680 lbs.
Dimensions: 72" x 23.875" x 1.69"
96.0625" x 23.875" x 1.69"
Weight psf: 6.25 lbs.

Please inquire for availability of other wood species.



Model: WT-IPE-72-SMOOTH



Model: WT-IPE-96-SMOOTH

Custom Wood Tiles

Bison fully custom wood tiles can be manufactured to your specific design requirements. Contact the Bison sales team for more information.

Care and Maintenance

Wood Characteristics:

Bison Wood Tiles are made of South American hardwoods which contain a rich variety of graining and coloration and are exceptionally dense and resistant to insects. The natural shading, coloration and graining variations add to the architectural character and overall visual appeal of the finished product.

Storage:

Keep product out of direct sunlight until it is ready to be installed. Bison Wood Tiles should not be stored tightly wrapped in plastic. Bison Wood Tiles will adjust to the climate where they are installed and may already have or developed some slight cracking or checking.

Cutting:

Carbide or diamond tipped blades are highly recommended. Bison Wood Tiles have a very high density and a slower feed rate is recommended when cutting tiles. In order to minimize checking (small cracks) the installer must seal any cut ends with Anchorseal® or other equivalent product. Apply sealer with a foam brush to the cut ends only, being very careful to not get any on the top surface of the wood.

Reassembly:

To reassemble tiles after cutting, the installer must pre-drill holes from the bottom, using a carbide drill bit designed to extract stock during drilling. Exercise caution to not drill through the top surface. In addition, use only stainless steel screws which are durable and provide maximum fastening power.

Fastening:

Bison strongly recommends the use of Bison Pedestals and the FS1 Fastening Kit* when installing Bison Wood Tiles. The Bison Pedestal/Wood Tile system installs quickly and securely and allows for removal later if required. The FS1 Fastening Kit*, available exclusively from Bison, fastens wood tiles to the pedestals without penetrating or damaging the wood tile and is sold only with Bison Wood Tiles.

Cleaning & Sealing:

If desired, Bison Wood Tiles can be periodically cleaned and sealed. Wood stabilizers or sealants can help mitigate the loss of moisture on the top of the boards and minimize checking and splitting. The installer can lightly wax or seal the ends of the wood if desired. *Note: Small checks and splits are normal and a natural part of the wood.* The following manufacturers offer cleaning and sealing products specifically designed for use with exotic hardwoods: Defy, Cabots, Penofin, Messmers. *Important: Bison recommends that you test any cleaners or sealants in an inconspicuous area first before applying them to the installed deck.*

Sanding:

If you plan to seal your deck and desire a more uniform appearance, a light sanding is highly recommended. Use 80 grit sandpaper to lightly sand the wood tiles and thus reduce the appearance of any minor marks, scratches or surface imperfections. After sanding, sweep the tiles and use water to rinse away any remaining dust and allow to dry thoroughly before applying sealer. Exercise caution when sanding wood with the scuff resistant surface. *Important: Always test any product you apply in an inconspicuous place to make sure it performs as you expect.*

General Safety Precautions:

Cutting, grinding, or sanding should be done outdoors or in a well-ventilated area. Wear safety glasses with side shields when handling, cutting, sanding, or grinding this material. Use a face shield for processes that may generate excessive dusts and splinters. Wear puncture resistant work gloves, such as leather when handling. Respirators must be worn if the ambient concentration of airborne contaminants exceeds prescribed exposure limits. Dust masks may be worn to avoid the inhalation of nuisance dust. Refer to product MSDS for more information.

Maintaining Tile Color:

To better maintain the rich coloration of the tiles, you can apply a penetrating oil finish with UV blocker. These products offer UV protection as well as mold and mildew protection. Before applying any finish, first clean and remove any residue from the wood tile as described above. After your initial coat is applied, an annual maintenance coat will help keep the coloration vibrant for years to come. *Important: Always test any product you apply in an inconspicuous place to make sure it performs as you expect.* (Continued on next page.)

*Patent #8,302,356.

**Wood tile colors may differ than pictured and change without notice.



Natural Aging:

Left to weather naturally and, depending on climatic conditions, Bison Wood Tiles will develop a silvery-gray patina. If you prefer this look, Bison recommends that a coat of wood stabilizer be applied after installation. Some products provide UV protection, allowing your wood tiles to acclimate more uniformly as weather and environmental conditions season the deck. *Note: Each board has unique characteristics and will weather at different rates. The amount of direct and indirect sunlight, temperature, humidity, moisture and other local conditions will factor into the time and shading of the deck. Shrinkage, cracks and changes in the wood tile is natural.*

Periodic Cleaning:

Commercial Cleaning Products: Bison recommends using a deck cleaning product which safely cleans the wood and also kills mold spores. To restore the pH balance of the deck, use a slightly acidic deck brightener. The deck tiles are ready to re-seal once they are cleaned. *Important: Always test any product you apply in an inconspicuous place to make sure it performs as you expect.*

Pressure Washing:

You may also use a pressure washer to remove built-up dirt, mold or mildew from your wood tiles. Bison recommends using a professional deck cleaning contractor. *Important: Test an inconspicuous area first and be careful to use the wand in even strokes to avoid lap marks.*

